


Assembly Hardware Included

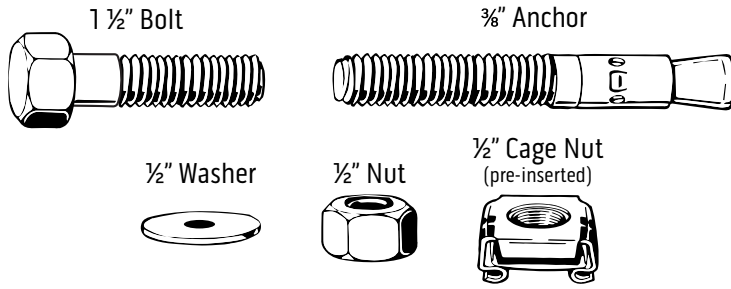

Tools Needed

- Hammer
- Utility Knife
- 3/4" Socket & Ratchet
- Torque Wrench
- 3/4" Wrench
- 3/8" Masonry Bit
- Hammer Drill

| | 4x4 | 4x6 | 4x8 | 6x4 | 6x6 | 6x8 | 8x4 | 8x6 | 8x8 | QUANTITIES |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------|
| 1 1/2" Bolt | 84 | 108 | 132 | 106 | 132 | 158 | 132 | 158 | 184 | |
| 3/8" Anchor | 16 | 20 | 24 | 20 | 24 | 28 | 24 | 28 | 32 | |
| 1/2" Washer | 156 | 196 | 240 | 192 | 240 | 288 | 240 | 288 | 336 | |
| 1/2" Nut | 68 | 88 | 108 | 86 | 108 | 130 | 108 | 130 | 152 | |
| 1/2" Cage Nut | 16 | 20 | 24 | 20 | 24 | 28 | 24 | 28 | 32 | |

- 1 - Start with any **B** corner by placing it to a corner edge of the space.
- 2 - Attach adjacent **A** panel to **B** corner using the 1 1/2" bolts with a washer on both the bolt and nut sides. Do not tighten, yet.
- 3 - Proceed with remaining panels until finished as shown in diagram. Add or subtract 2' A panels to create size of building purchased. If you have A/V (audio/video) panels, they can be substituted in any of the A panel locations.
- 4 - Install the roof **J** panels. The roof's square holes will have cage nuts on the outside. Use 1 1/2" bolts and washers from the inside. Do not tighten.
- 5 - Straighten and square walls. Using 3/4" socket and wrench, tighten and torque bolts as you square up. Tighten and torque roof.
- 6 - Using a 3/8" masonry bit, drill 4" deep holes at the anchor hole locations. Tap in wedge anchors in holes. Put washer and nut on anchor and tighten to manufacturer-recommended 25 lbs. torque.

